

## Description

PSTN add-on is an additional module that allows you to expand the communication capabilities of the lares 4.0 control panel.

It allows voice calls and Contact ID messages to be sent whenever one of the events programmed in the control panel occurs.

Installation is quick: it plugs into the control panel's motherboard and connects to the telephone line via a standard connector.


It can function both as a backup for the 4G/LTE module and as the main line.

It is not compatible with the plastic box.



KSI4200001.300

## Description of connections

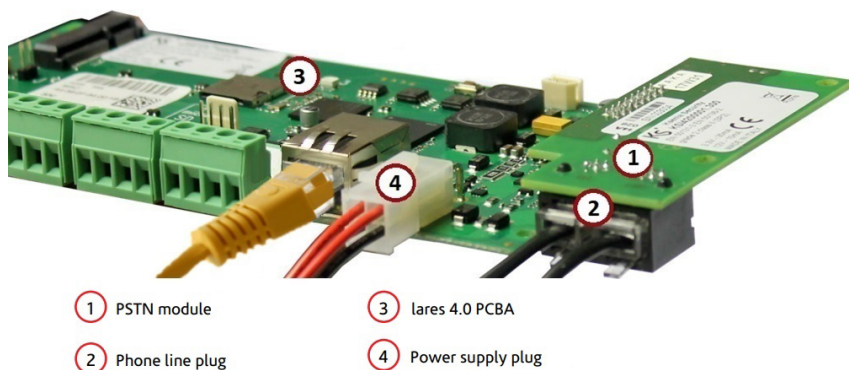

| Communications with Add-on PSTN module                       |                                    | lares 4.0     | Add-on PSTN                  |
|--------------------------------------------------------------|------------------------------------|---------------|------------------------------|
| Communications to the users                                  | Vocal notifications and menus      | —             | ●                            |
|                                                              | SMS                                | —             | —                            |
|                                                              | e-mail                             | ●             | —                            |
| Communication protocols to the CMS/Vigilo monitoring station | Contact-ID (SIA DC-05)             | —             | ●                            |
|                                                              | IP Protocols (SIA DC-09 Level III) | ●             | —                            |
| Remote management options                                    | Arm / Disarm                       | APP Webserver | APP/vocal menu (by scenario) |
|                                                              | Output management                  | APP Webserver | APP/vocal menu (by scenario) |
|                                                              | Video verification                 | ●             | —                            |
|                                                              | Audio verification                 | —             | —                            |
| Configuration                                                | SecureWeb                          | ●             | —                            |

## Technical Specifications

|                        |                                  |
|------------------------|----------------------------------|
| Add-on module:         | with 16-pin connector            |
| Power supply:          | 12 V and 3.3 V DC                |
| Current consumption:   | 10 mA at 12 V, 30 mA at 3.3 V DC |
| Operating temperature: | from +5 °C to +40 °C             |
| Connector:             | RJ-11 (2)                        |
| Dimensions:            | 38 × 80 × 16 mm (W × H × D)      |

## How to order

KSI4104001.300 - Communications additional module PSTN Add-on

## Certifications

Europe - CE, RoHS  
IMQ: EN50136 Grade 2 - Class II  
INCERT: T031: 2017



D-Q2T-0013

Technical specification, appearance, functional and other product characteristics may change without notice